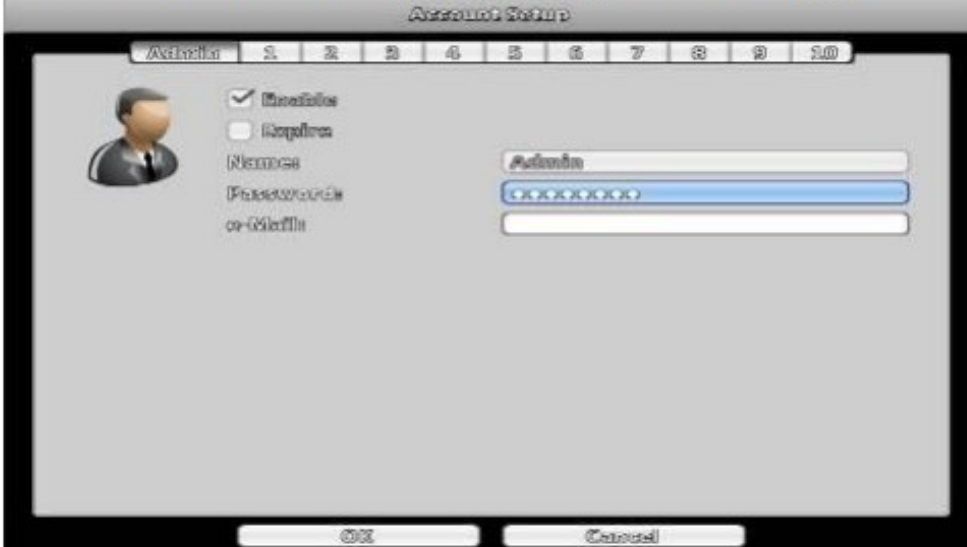


3-4 Account Setup

You can set the user password and permissions of 10 user accounts (1 admin + 10 users). These different accounts gives users different permissions of DVR features.

3-4.1 Administrator

The default admin account and password is “**admin**” and “**123456**”

The screenshot shows a window titled "Account Setup" with a tab bar at the top containing tabs numbered 1 through 10. The first tab, labeled "Administrator", is selected. On the left side of the window, there is a placeholder icon for a user and a list of settings: "Enable" (checked), "Expire" (unchecked), "Name" (with the value "Admin" entered), "Password" (with "123456" entered and masked with asterisks), and "e-Mail" (empty). On the right side, there are input fields for these settings. At the bottom of the window are "OK" and "Cancel" buttons.

Item	Description
Enable	Check to activate the user's account.
Expire	Set the expire date of the user account
Name	Set up the username
Password	Set up the password. The password can be mixed of letters and numbers and is case-sensitive.
e-Mail	Set up user email

You can restrict access to CCTV console locally or via remote access on a mobile device by adding **Other Users** and restricting access to what can be done and viewed.

Once the restricted account has been created you would login using the **Username and Password** created at either the CCTV console or via the mobile device app (SoCatch) with restriction applied.

3-4.2 Other Users

The screenshot shows the 'Account Setup' window. At the top, there's a tab bar with 'Admin' selected. Below it, a user icon is shown. To the right of the icon are checkboxes for 'Enable' and 'Expire', and a date field showing '1/1/2070'. Below these are input fields for 'Username', 'Password', and 'e-Mail'. A 'Permissions' section follows, containing several groups of checkboxes: 'Console Playback', 'Remote Live & Playback', 'Console' (with sub-options 'Live', 'Configure'), 'Remote' (with sub-options 'Live', 'Configure'), 'Playback', 'System', 'Backup', and 'PTZ & Relay'. A numeric keypad is located to the right of the 'Console' and 'Remote' sections. At the bottom are 'OK' and 'Cancel' buttons.

Item	Description
Enable	Check to activate the user's account.
Expire	Set the expiration date of the user account
Name	Set up username
Password	Set up the password. The password can be mixed of letters and numbers and is case-sensitive.
e-Mail	Set up user email

3-4.2.1 Permission

The Account Setup is set to provide individual user role-based permissions, including access to Setup menu, Network operation, PTZ function, Playback, Utility, Backup, Password expiration date and Mask on specific channels while playing back.

Item	Description
Console Playback	Allow the permissions to playback channel in local side
Remote Live & Playback	Allow the permissions to live monitor/playback channel in remote side
Console	Allows the permissions to operate in local side (Live, Playback, Backup, Configure, System, PTZ)
Remote	Allow the permissions to operate in remote side (Live, Playback, Backup, Configure, System, PTZ)

This is a close-up of the permissions section from the previous screenshot. It shows the 'Console' and 'Remote' sections. In the 'Console' section, the 'Console' checkbox is checked and circled in red. In the 'Remote' section, the 'Remote' checkbox is checked and circled in red. Below the 'Remote' checkbox, the 'Configure' checkbox is highlighted with a blue mouse cursor. Other checkboxes like 'Live', 'Playback', 'System', 'Backup', and 'PTZ & Relay' are also visible.

※ use of local, remote permissions, respectively, the option must be checked, otherwise it will not work