

Over the browser


First, right click anywhere on the screen in the DVR, then click on Main Menu.



Once this has opened up, click on "System"




Then at the top, click on "Network", make sure DHCP is ticked. Press Apply/Confirm and take note of the IP Address.

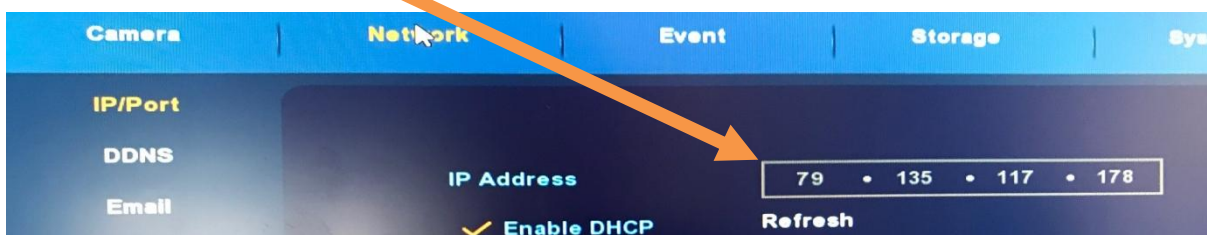


Type the IP address into the address bar on Internet Explorer.



Download and run the plugin. Once downloaded, install and click run. When logged into the NVR using "admin" // "12345", click on Basic Setup.

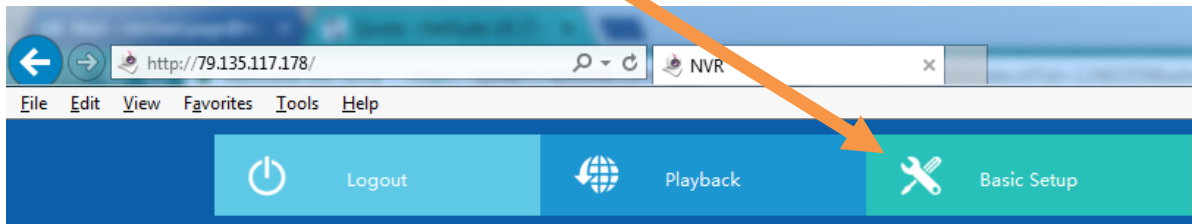

Once inside Basic Setup, you will see "System time" at the top. Either Set Manually then input the date/time using the drop down boxes or select "Synchronise with computer time"

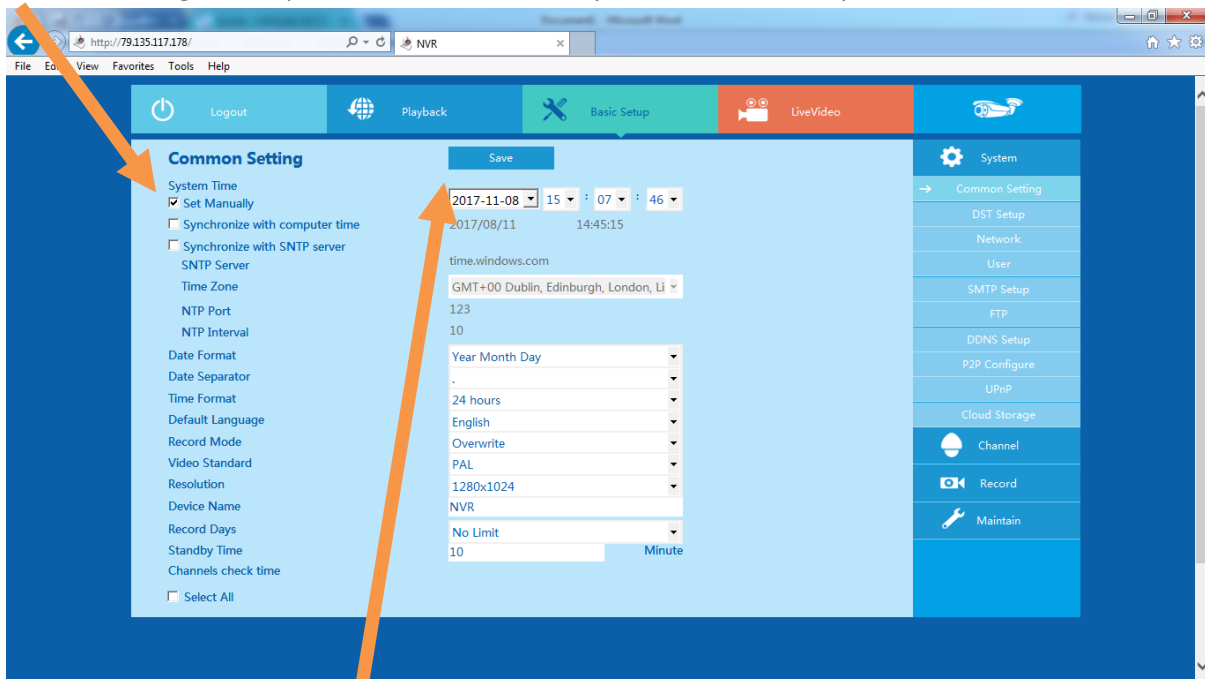

Once this has been done, click save and the NVR date/time will be changed.

Changing through the NVR

First, right click anywhere on the screen in the DVR, then click on Main Menu.




Once this has opened up, click on "System"



In this menu, select "Date"



Now type in the correct date/time using the onscreen keypad. Once done, click the Return arrow.

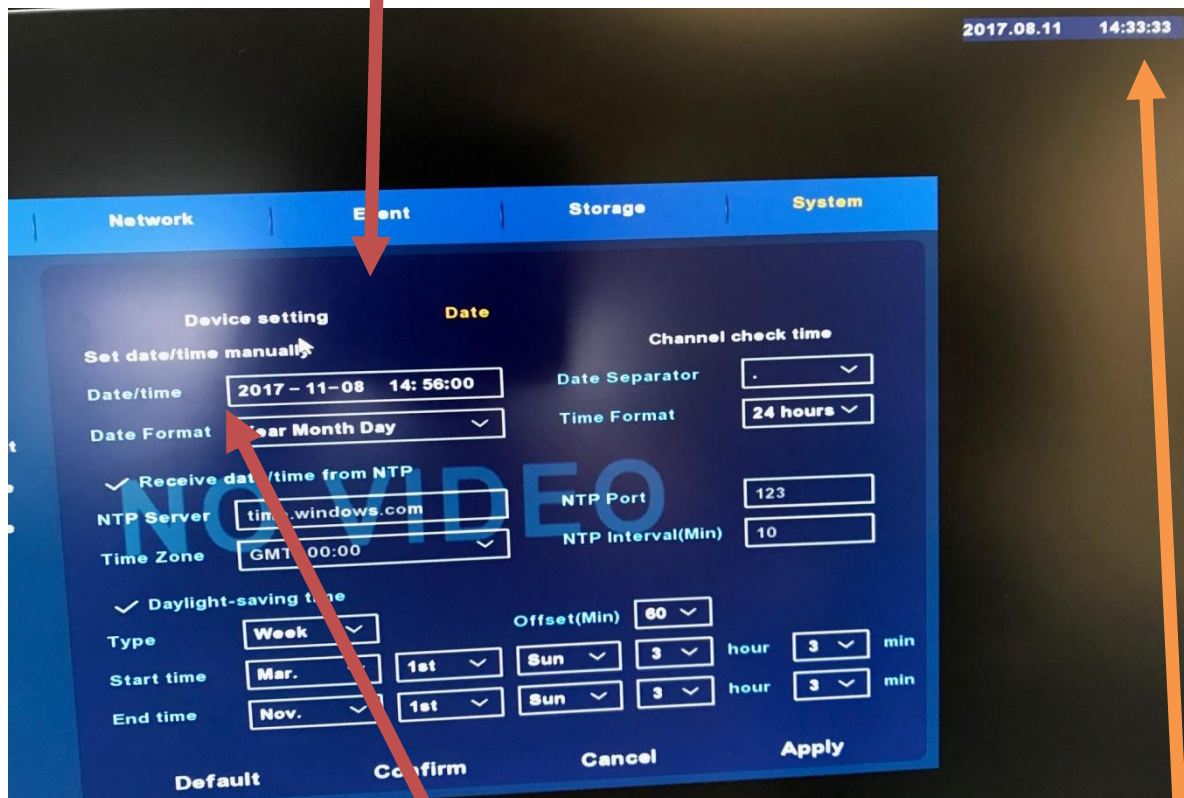

Once this has been done, click on "Set date/time manually". This will then change the time and date.

