


3-12 P2P Connection Setup

How to Setup

1. On your DVR/IVR, please go to Network Setup page:
Main control panel => Configuration => Network Setup
2. On lower part of Network Setup page, please input P2P Access Key for P2P and press Apply button.

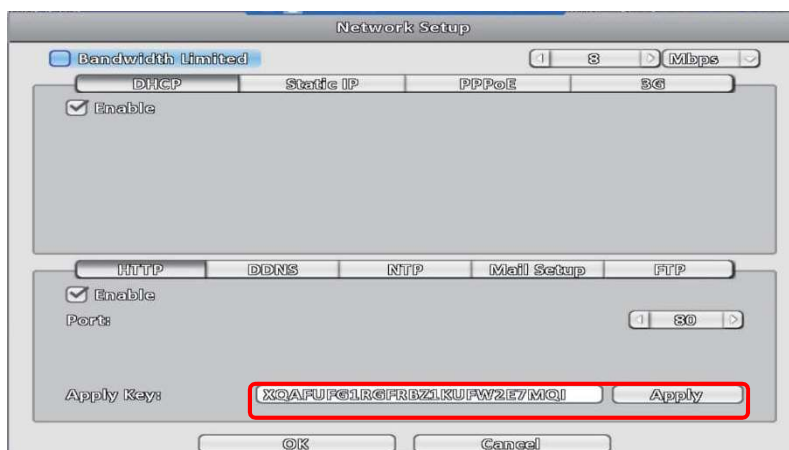

Please press OK button on lower part of Network Setup page and return to Configuration level.

3. Please go to System Information page:
Main control panel => Configuration => System Information




Under Network tag, you can find QR code, access key and expiry date for P2P feature.



For computer use, please login iWatchDVR.
 On prompting interface, please input P2P Access Key in Host field, input / modify the rest of fields as appropriate
 Click on Connect button

- For mobile device (i.e., smart phone and tablet) users, please login APP "Socatch"
 Click '+' (iOS) / 'New' (Android) icon on upper right corner to add a new connection.

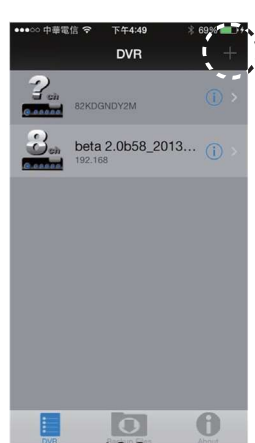

iOS



Android

- Click on Scan QR code button as shown on following picture.

iOS

Android

6. Please scan QR code on DVR's System Information page

System Information

DVR

Model: 8CH (NTSC)

Version: 2.0b57_20151110

Network

IP: 192.168.8.190

MAC: 00:17:4F:25:5B:0F

HDD

Recording Scheme: Continuous Record

Model	Status	Attribute	Free/Capacity

S.M.A.R.T. Information...

Place

7. Access key information will be shown on Host field

Cancel Add DVR Save

Name

Host: 28KDGNDY2MU7BNTYS81D

Port:

User:

Password:

Scan QR code

Back New Clear Save

Name:

Host: 28KDGNDY2MU7BNTYS81D

Port:

User:

Password:

Scan QR Code

Input / modify the rest of fields as appropriate.

Click on Save button on upper right corner.

Login with new settings